


# RX200-3-ZGSM-2-RGD28

ZGSM LED Signal Heads for Road Signal Systems

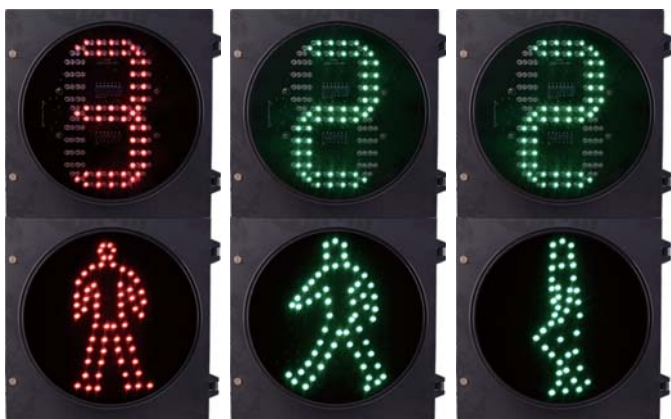

## Characteristics

- ⊗ Utilizing imported LED chip, long lifespan.
- ⊗ Using constant current driver, working voltage 100-240VAC, low power
- ⊗ Novel structure and beautiful appearance, using inflaming retarding and UV-proof housing material.
- ⊗ Long visible distance, symmetrical light distribution.
- ⊗ Multi-ply sealed water resistant, IP rating: >IP54.
- ⊗ In accordance with GB/14887-2011 and relevant International standard.
- ⊗ Visible distance: >500M.
- ⊗ Working humidity: ≤95%
- ⊗ LED Driver: Constant current driver (Efficiency>85% PF>0.85).

## ⊗ Main Technology Index

Model	Light Color	LED Qty	Light Intensity ( mcd )	Wavelength ( nm )	Visual Angle	Power Consumption ( W )	Operating Temperature ( °C )	Working voltage	Housing material	Dimension
RX200-3-ZGSM-2-RGD28	R	Man: 60	5000~7000	625±5	<30°	< 5W	-40~+75	100-240VAC 50/60Hz	PC	500 x250 x160 mm 19.7 x9.8 x6.3 inches
		Countdown: 70				< 2W				
	G	Man: 84	8000~13000	500±5		< 5W				
		Countdown: 70				< 2W				

## ⊗ Product Packing

Model	Qty	Packing Dimension	Gross Weight	Fixture Weight ( single )	Packing material	Packing Volume
RX200-3-ZGSM-2-RGD28	2	530 x390 x290 mm 20.9 x15.4 x11.4 inches	12.7 kg /28.0 lbs	5.6 kg /12.3 lbs	carton, foam	0.06 m³